

HYDROHEATER TECHNOLOGY

Direct steam injection technology is ideal for heating liquids and slurries over a wide range of viscosities and solids content to precise temperatures.

Direct-contact steam injection technology has been used worldwide since the Industrial Revolution and the advent of steam boilers. This white paper details the basics of this often-overlooked heating technology. It explains the differences between direct and indirect heating, describes the direct steam injection spectrum, and details the advantages of Hydroheater technology.

Indirect Heating

Indirect-contact heat exchangers have two or more fluid flow paths that do not allow for direct mixing of the fluids. They promote the transfer of heat from one fluid to another across a thermally conducting, but otherwise impermeable, barrier such as a tube wall or plate. With indirect heating, approximately 83% of the heat energy is transferred to the process fluid, while the remaining 17% of the energy has the potential to be lost in the condensate formed from the steam.

Direct Heating

Conversely, direct heating exchangers transfer heat by injecting steam from a plant's steam supply into the process fluid (liquid or slurry) that needs to be heated. Injecting steam directly into the process fluid results in more rapid heat transfer and more efficient energy use than indirect heat exchangers. Direct-contact steam heating can provide 100% thermal efficiency, because both the sensible and the latent heat of the steam are used. Energy savings can be considerable- reductions in the 20-25% range are not uncommon.

Because it requires less space than other methods of heat transfer, direct-contact heating allows for a reduction in both equipment expense and space requirements. In addition, this technology eliminates the need for condensate return systems, which are often required for indirect heat exchangers.

Hydroheater Technology

The Hydroheater technology (Figure 1) takes direct heating a step further by precisely metering the steam flow, which results in instantaneous condensation of the steam and provides temperature control within 1° F.

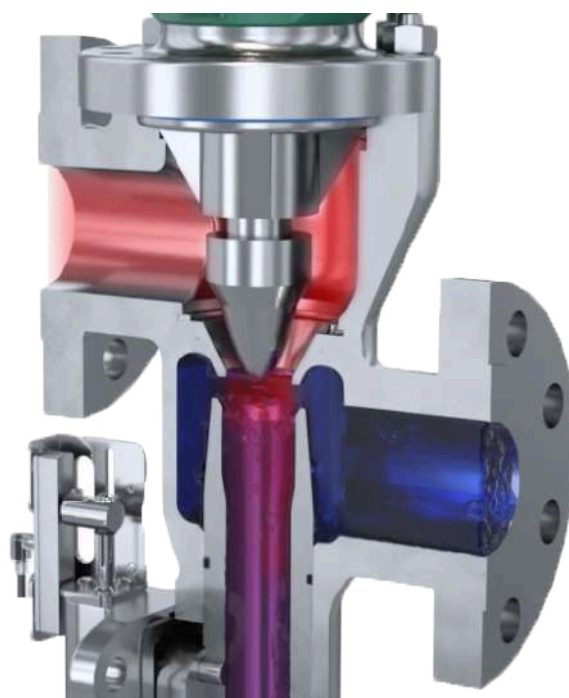


Figure 1: Hydroheater technology injects precise amounts of steam into the process fluid

A benefit of Hydroheater technology is rapid, uniform heating, which is important in the ability to handle difficult-to-heat fluids such as highly viscous fluids, fluids with the potential for bake-on, and abrasive slurries. In addition, Hydroheater technology is self-cleaning, which eliminates plugging and fouling of the heat transfer surface.

HYDROHEATER TECHNOLOGY

Direct Steam Injection Spectrum

There are many direct steam injection forms, including spargers, externally modulated heaters, and internally modulated heaters. Each method varies in its complexity levels, with sparging being the simplest and internally modulated, creating level technology and control.

Sparging

Sparging is the oldest and least complicated technique of mixing steam with liquid or slurry to heat. Though considered inexpensive and straightforward, sparging is inefficient. The operation invariably results in poor heat injection economics due to steam energy escaping from vessels without condensing. Sparging is the least controllable direct steam injection heating method; it is injecting steam directly into a fluid-filled tank or pipe. When sparging equipment is operated outside of the design parameters, there is an increased risk of equipment failure (both vessel and sparger pipes) due to the vibration associated with the steam hammer. Additionally, high maintenance costs for tanks, sensors, and piping are not uncommon with sparging.

External Modulation

Externally modulated direct steam heating (Figure 2) uses a steam control valve on the supply line to vary the pressure of the steam at the point of injection. Varying the pressure changes the steam density and velocity through the nozzle to control the amount of heating. Unfortunately, regulating steam pressure to control heating can result in unstable operation, hammering, and vibration when high or low steam flow rates are required. At low flow (such as trim heating), the differential between steam pressure and the process can be minimal, and a slight fluctuation in either pressure can cause an upset. Alternatively, at high steam flow requirements (maximum heating at startup), the orifice or nozzle size will allow more steam to be condensed, and steam hammer will occur.

Internal Modulation

Internally modulated direct steam heating (Figure 3) controls the injection area rather than steam velocity and density to regulate the amount of heating. An internally modulated heater operates at higher steam velocities compared to an externally modulated heater. This higher velocity produces improved, often rapid-mixing and nearly instantaneous, condensation of the steam into the process fluid.

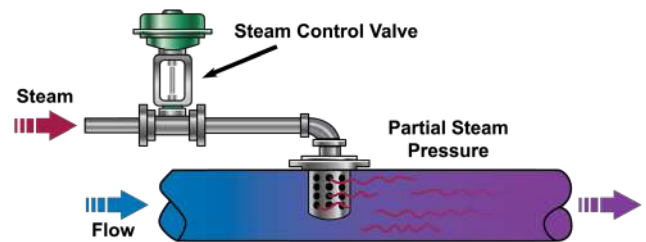


Figure 2: External Modulated direct-contact steam heating

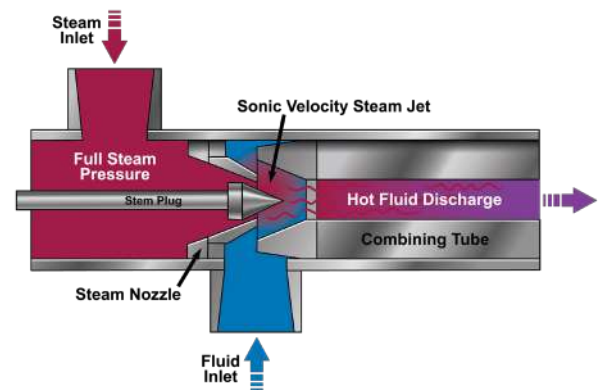


Figure 3: Internally Modulated direct-contact steam heating

HYDROHEATER TECHNOLOGY



Hydro-thermal Hydroheater

The Hydroheater Advantage

Hydroheater technology uses only internal modulation and controls both steam flow and mixing turbulence by employing a modulating stem plug and nozzle assembly inside the heater. The precise mixing of metered amounts of high-velocity steam directly with a liquid or slurry provides an instantaneous transfer of heat from steam to the liquid. To accomplish this, a specifically engineered, variable-area steam nozzle meters the flow at the injection point and contact with the fluid. The large pressure drop from full steam pressure to the process fluid pressure ensures high-velocity choked steam flow and instantaneous mixing of the two streams. When the steam flow is choked, its velocity at the nozzle exit is constant regardless of the total mass flow injected. The internally modulated Hydro-Thermal heaters control the amount of injection area (cross-sectional area of the nozzle opening) to regulate the heat load precisely. The constant steam velocity results in consistent and stable operation across the full range of operations.

Additional Information

Hydroheaters are not a one-size-fits-all solution. A potential limitation of direct steam injection heating is that the steam is injected directly into the process fluid. If the process fluid is sensitive and cannot tolerate this, steam injection cannot be used. The addition of the condensate to the process must be considered when specifying steam injection equipment.

Hydroheaters do however, consistently outperform heat exchangers and other fluid heating systems. The reason for this is simple: Each Hydroheater is created in response to the input determines the custom design for the customer's specific needs and requirements.



400 Pilot Court | Waukesha, WI 53188
(262) 548-8900 | (800) 952-0121

Admin-145 RevC/2020

📍 **Via Torre, 2**
📍 **28040 Borgo Ticino (NO) - Italy**
☎ **+39 0321 908466**
✉ **customercare@exonder.it**
🌐 **<https://www.exonder.it>**



EXONDER®